




- 10" (250 mm) SUBWOOFER
- Frequency range: 20÷ 300 Hz
- RMS/Peak Power: 150/300 W
- Air dried coated paper cone
- Butyl rubber surround
- Air cooled ø 50 mm 4 layers voice coil
- 4 Ohm

Dimensions

Recommended Enclosures

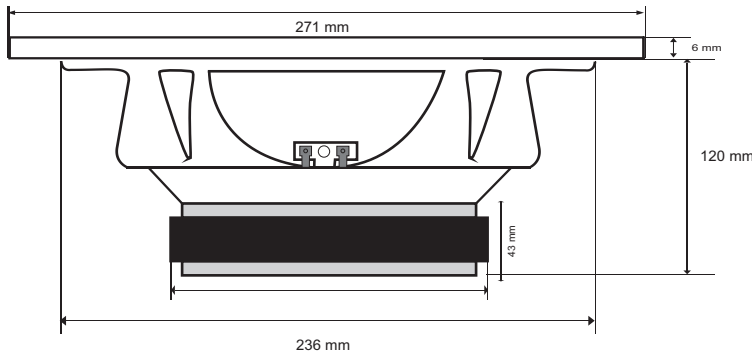

SEALED  VENTED

Box Type	Box It	Vent mm ø	length	Box Type
SEALED	16	--	--	SPL
SEALED	21	--	--	Hi-Fi
SEALED	26	--	--	Extended Bass


Features

Wiring


Voice Coil Wiring

		Parallel	Single	Serie
Fs	Hz		38.7	
Re	Ohm		3.2	
Qms			5.8	
Qes			0.79	
Qts			0.69	
Vas	Litres		33	
Mms	Gr		113	
Cms	mm/Newton		0.15	
Bl	Tesla-m		10.57	
L @ 1KHz	mH		2.63	
Area	Cm2		398	
X-max (+/-)	mm		5	
SPL ref	dB		88	


Series

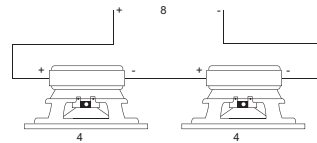

Parallel

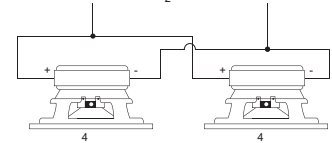


Series - Parallel

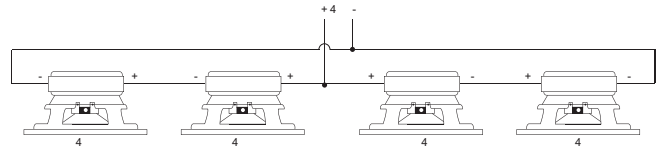

Calculating Volume - Calcolo del volume di una cassa

BOX TYPE A

$$\text{Volume (litres)} = \frac{A \times B \times C \text{ (cm)}}{1.000}$$

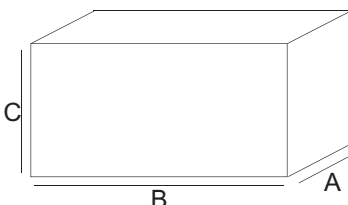

- Calculating volume is just a matter of measuring the inner dimensions in cm and using the formula:
- Per calcolare il volume di una cassa, misurate le dimensioni interne in cm e applicate la formula:
- Zur Volumen-Berechnung benötigen sie die genauen Masse und Dimensionen in Zentimetern:
- On calcule le volume en mesurant la dimension de chaque cote et en utilisant la formule suivante:

BOX TYPE B

$$\text{Volume (litres)} = \frac{\left(\frac{B+D}{2}\right) \times A \times C \text{ (cm)}}{1.000}$$

